



2L170-15-W

2L170-20-W

2L200-25-W

2L300-40-W

订购码

2L	170	16	AC110V	J
订货代码	流量孔径	接管口径	标准电压	接线形式
2L二位二通电磁阀(蒸汽型)	170: 17mm 200: 22mm 300: 30mm 500: 50mm	10: 3/8" 15: 1/2" 20: 3/4" 25: 1" 35: 1 1/4" 40: 1 1/2" 50: 2"	DC12V DC24V AC24V 50Hz/60Hz AC110V 50Hz/60Hz AC220V 50Hz/60Hz AC380V 50Hz/60Hz	无引线式 W: 引线式

图形符号



规格参数

型号	2L170-10	2L170-15	2L170-20	2L200-25	2L300-35	2L300-40	2L500-50
工作介质	空气、水、蒸汽						
动作方式	先导式						
型式	常闭型						
流量孔径	17mm		22mm		30mm		50mm
CV值	4.8		12		20		48
接管口径	3/8"	1/2"	3/4"	1"			2"
使用流体粘滞度	20 CST以下						
使用压力	0.1-1.5 MPa						
最大耐压	2.25MPa						
工作温度	-10-180 °C						
使用电压范围	±10%						
本体材质	黄铜						
密封材质	PTFE						


阀类 阀类

JV	J4V
J4V100	J4V100
J4V200	J4V200
J4V300	J4V300
J4V400	J4V400
SV	SV
SV	SV
JEL/电磁阀	J4V/电磁阀
JSV	JSV
SJV	SJV
MCS	MCS
JVT307	JVT307
JEL	JEL
MVSD	MVSD
VF	VF
BA	BA
NAMUR	NAMUR
SS1	SS1
JEL10	JEL10
3VZIF	3VZIF
膜片阀	膜片阀
旋转阀	旋转阀
JELMP	JELMP
JELPVG	JELPVG
3V1	3V1
球阀	球阀
2P	2P
2V	2V
2W	2W
2W03	2W03

2L

VX	VX
PJ	PJ
PU225	PU225
ZQ	ZQ
JEL5404	JEL5404
JEL6213	JEL6213
BU	BU
脉冲阀	脉冲阀
角座阀	角座阀
手拉阀	手拉阀
手拉阀	手拉阀
手拉阀	手拉阀
脚踏阀	脚踏阀
机械阀	机械阀
ASC, RE	ASC, RE
QE, QEA	QE, QEA
ST	ST
手滑阀	手滑阀

外形尺寸

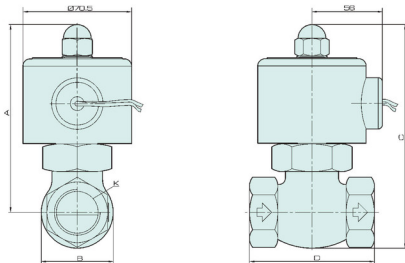

尺寸表

型号	A	B	C	D	K
2L170-10	125	42	146	82	PT3/8"
2L170-15	125	42	146	82	PT1/2"
2L170-20	125	42	146	82	PT3/4"
2L200-25	136	52	162	90.5	PT1"
2L300-35	148	74	185	111	PT1 1/4"
2L300-40	148	74	185	111	PT1 1/2"
2L500-50	176	86	223	163	PT2"