



JEL6213-04-J



JEL6213-06-J




JEL6213-08-J

订购码

JEL	6213	04	AC220V	J
佳尔灵品牌	型号	接管口径	标准电压	接线形式
		02: 1/4"	DC12V DC24V	J: 接线盒
		03: 3/8"	AC24V 50/60Hz	
		04: 1/2"	AC36V 50/60Hz	
		06: 3/4"	AC110V 50/60Hz	
		08: 1"	AC220V 50/60Hz	


图形符号



规格参数

型号	JEL6213-02	JEL6213-03	JEL6213-04	JEL6213-04	JEL6213-06	JEL6213-06	JEL6213-08
公称口径	10mm			14mm		25mm	
接管螺纹	PT1/4"	PT3/8"	PT1/2"	PT1/2"	PT3/4"	PT3/4"	PT1"
工作压力	0.03 ~ 1.0MPa						
环境温度	-10 ~ +55°C						
介质温度	-10 ~ +90°C						
KV值	2		3.6	8.3	8.3	11	11
功率消耗	AC(VA)	14					
	DC(W)	8					
切换频率	≥1 Sec			≥0.5 Sec			

外形尺寸

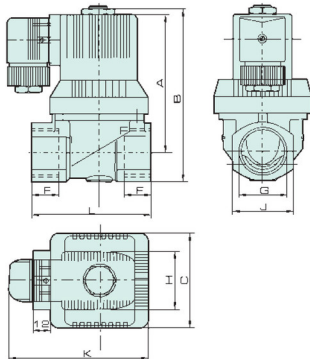

尺寸表

型号	G	C	F	L	J	A	B	H	K
JEL6213-02	PT1/4"	38	14	50	26	71	85	35	71
JEL6213-03	PT3/8"	38	14	50	26	71	85	35	71
JEL6213-04	PT1/2"	38	14	50	26	71	85	35	71
JEL6213-04	PT1/2"	45	16	58	31	82	96	35	80
JEL6213-06	PT3/4"	45	16	58	31	82	96	35	80
JEL6213-06	PT3/4"	65	18	82	41	96	117	35	90
JEL6213-08	PT1"	65	18	82	41	96	117	35	90

阀类

- J4V
- J4V100
- J4V200
- J4V300
- J4V400
- SV
- 5V
- J4V/5V底座
- JSY
- 5JV
- MCS
- JVT307
- JEL
- MVSD
- VF
- BM
- NAMUR
- 551
- JEL10
- 3VJZF
- 膜片阀
- 旋转阀
- JELMP
- JELP/G
- 3V1
- 线圈
- 2P
- 2V
- 2W
- 2W(块)
- 2L
- VX
- PU
- PU225
- 2Q
- JEL5404
- JEL6213**
- BU
- 脉冲阀
- 角座阀
- 手扳阀
- 手扳阀
- 手转阀
- 手拉阀
- 脚踏阀
- 机械阀
- ASC, RE
- QE, QEA
- ST
- 手滑阀